

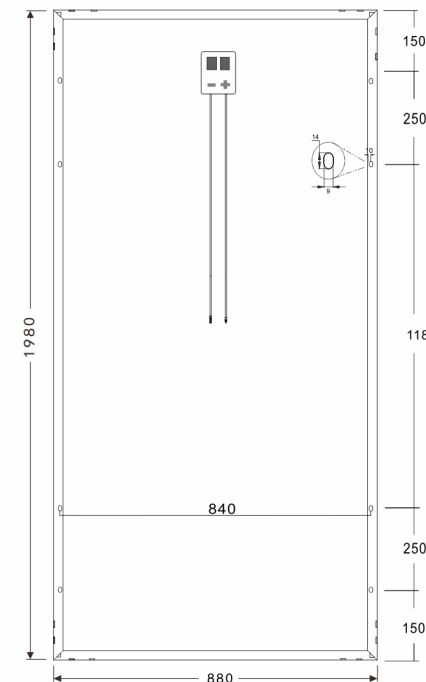
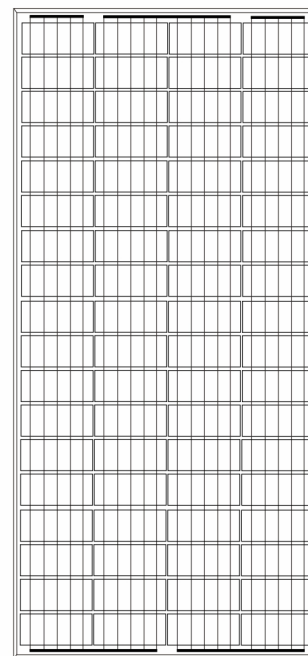


CN-210M36040

INTRODUCTION

- ↓9% Saving labor cost
- ↓7% Saving cable cost
- ↓8% Saving bracket cost
- ↓6% Saving logistics cost

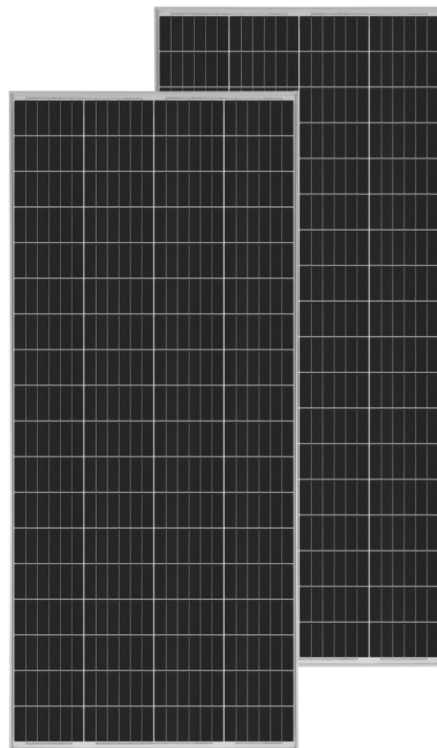

Units:mm±2

Electrical Parameters at (STC)

Power (W)	Module Efficiency(%)	Voltage at Pmax(Vmp)	Current at Pmax(Imp)	Open Circuit Voltage(Voc)	Short Circuit Current(Isc)	Power Tolerance(w)
360W	20.66%	40.75	8.83	49.24	9.35	± 3%

PS:Frame color and cable length can be customized




Mechanical Parameters

Solar Cell(Type/Size)	MONO(210mm)
Solar Cells Number	72Pcs(4x18)
Dimension	1980x880x35mm
Tempered Glass	3.2 mm High Permeability Coated
Frame	Anodized aluminum alloy
Junction Box	IP67`3*20A MOS diode
Cable	4.0mm ² , (+) 1000mm/(-) 1000mm
Connector	Original MC4/Compatible MC4

Packing

Module Type	CN-210M36040
Carton Size	1990x890x85mm
Number	2Pcs/Ctn
G. W	42Kg/Pcs
N. W	40.1Kg/Pcs
20GP Container	375Pcs
40HQ Container	937Pcs

- IEC61215,IEC61701,IEC61730
- ISO9001:2015 Quality management systems
- ISO45001:Environmental management systems



STC: ☀️ Light intensity 1000W/m² 🔋 Battery temperature:25°C ☁️ atmosphere quality=15

NOCT: ☀️ Light intensity 800W/m² 🔋 Battery temperature:20°C ☁️ atmosphere quality=15 🌬️ wind velocity 1m/s